




BEARING PRECISION AXLE CORP.

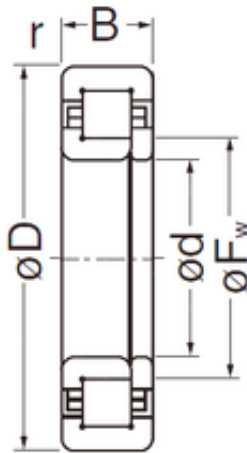

40 mm x 80 mm x 23 mm NACHI NUP2208EG Cylindrical roller bearings

Bearing No. NUP2208EG

Size	40x80x23 mm
Bore Diameter	40 mm
Outer Diameter	80 mm
Width	23 mm
d	40 mm
Fw	49,5 mm
D	80 mm
B	23 mm
C	23 mm
r min.	1,1 mm
r1 min.	1,1 mm
Weight	0,743 Kg
Basic dynamic load rating (C)	72,5 kN
Basic static load rating (C0)	77,5 kN
(Grease) Lubrication Speed	7500 r/min
Configuration	Single Row
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	40 mm
Outside Diameter	80 mm
Width	23 mm
Fillet Radius/Chamfer	1.1 mm
Inside Ring Outside Diameter	49.5 mm
r1	1.1 mm

NUP2208EG Bearing 2D drawings and 3D CAD models



BEARING PRECISION AXLE CORP.

Dynamic Load Rating	72,500 N
Static Load Rating	77,500 N
Limiting Speed - Grease	7,500 rpm
Limiting Speed - Oil	9,000 rpm
Radial Clearance	0.025 to 0.050 mm
db (min)	47 mm
db (max)	49 mm
dc (min)	52 mm
dd (min)	56 mm
Da (max)	73 mm
ra (max)	1 mm
ra1 (max)	1 mm