




## BEARING PRECISION AXLE CORP.

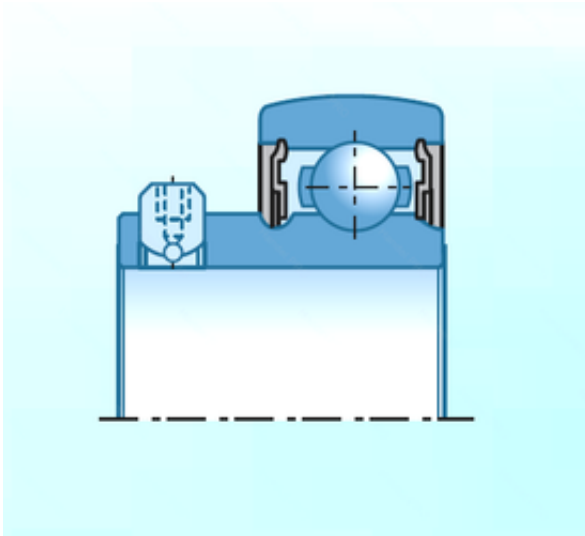

35,000 mm x 72,000 mm x 34 mm NTN  
AS207D1 Deep groove ball bearings

Bearing No. AS207D1

AS207D1 Bearing 2D drawings and 3D CAD models

Size	35x72x34 mm
Bore Diameter	35,000 mm
Outer Diameter	72,000 mm
Width	34 mm
d	35,000 mm
D	72,000 mm
B	34 mm
C	17 mm
Category	Insert Bearings Spherical OD
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.377
EAN	4547359021851
Product Group	M06110
Inner Race Profile	Narrow Inner Ring
Outer Race Profile	Spherical
Relubricatable	Yes
Seal Type	Single Lip Contour Riding
Mounting Method	Set Screw
Rolling Element	Ball Bearing
Snap Ring	No
Long Description	35MM Bore; Narrow Inner Ring; Ball Bearing; 34MM Length Thru Bore; 17MM Outer Race Width; 72MM



## BEARING PRECISION AXLE CORP.

	Outside Diameter; Relubricatable; Single Lip Contour Riding Seal; Set Screw Mounting Method; No Snap Ring
Inch - Metric	Metric
Other Features	Single Row   Light Duty   Steel Cage   Metric
Category	Insert Bearings
UNSPSC	31171536
Harmonized Tariff Code	8482.10.50.00
Noun	Bearing
Keyword String	Insert
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	AS207D1
Weight / LBS	0.838
Bore	1.378 Inch   35 Millimeter
Outside Diameter	2.835 Inch   72 Millimeter
Outer Race Width	0.669 Inch   17 Millimeter
Length Thru Bore	1.339 Inch   34 Millimeter
bore diameter:	35 mm
fillet radius:	1.5 mm
outside diameter:	72 mm
radial dynamic load capacity:	25700 N
outer ring width:	17 mm
radial static load capacity:	15300 N
inner ring width:	34 mm
bearing material:	Through Hardened Steel
bore type:	Round
finish/coating:	Uncoated
locking device:	Set Screw Collar
maximum rpm:	4200 RPM



## BEARING PRECISION AXLE CORP.

duty type:	Standard Duty
seal type:	Contact
overall width:	34 mm
series:	AS2
operating temperature range:	-40 to 120 ° C
manufacturer product page:	<a href="#">Click here</a>